

SPECTROLINE®

AccuMAX™ XRP-3000

Advanced Digital Radiometer/Photometer Kit


Single detector with dual sensors measures **both** ultraviolet and visible light. Complies with MIL and ASTM specifications for MPI and FPI. Specially engineered for NDT applications.



**Now With
Multilingual
Display!**

Features

- Microprocessor-controlled readout unit with dual-wavelength sensor detector
- Superior bandpass interference filter
- Choice of direct or USB connection between sensor detector and readout unit
- Excellent cosine response
- User-selectable, multilingual display settings. Choose from English, French, German and Spanish.
- Large, easy-to-read LCD screen
- Sealed sensor housing and USB connection with water-resistant adapter

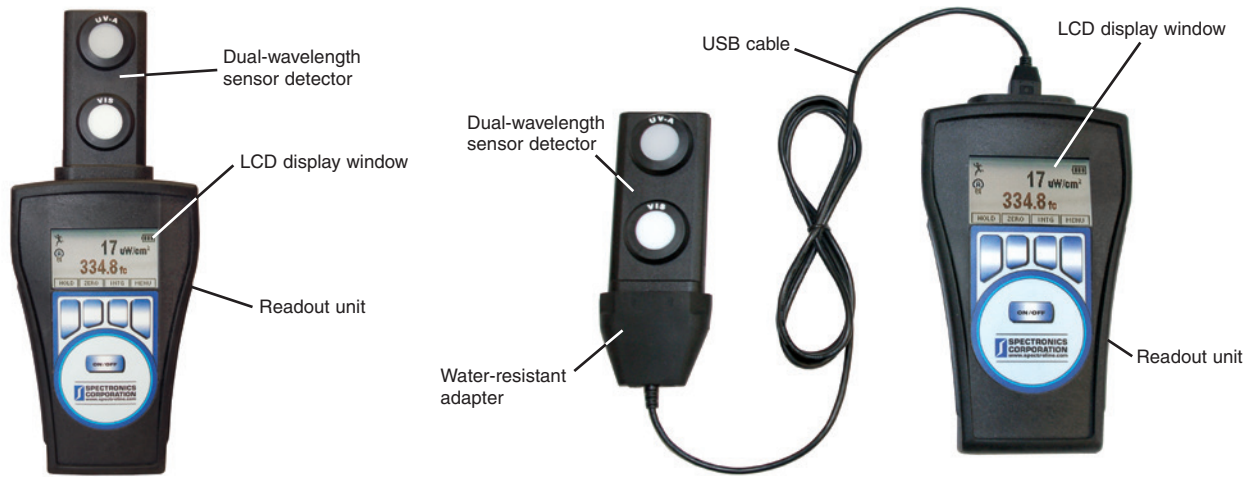

Allows Direct or USB Cable Detector Connection

Accurate

The **AccuMAX™ XRP-3000** radiometer/photometer kit uses a dual-wavelength UV-A/VIS sensor detector to measure both ultraviolet and visible light. Featuring automatic zeroing, integration and signal hold, the unit provides accurate readouts for UV, visible irradiance or radiance. The LCD readout features $\pm 0.2\%$ linearity with the sensor sending the linearity correction data to the readout unit during initial power up. To ensure consistent results, sensors are designed with superior bandpass filters while optical stacks are assembled in Class 100 clean workstations. For precise spectral coverage, high-quality interference filters are used to resist degradation.

Durable

The rugged meter housing features a removable, rubber protective boot for better grip and to help prevent accidental breakage. It also provides superior protection against moisture contamination, shock and humidity. In addition, the **XRP-3000** features a liquid- and water-resistant, sealed sensor housing with a special self-sealing ring to help eliminate light leakage.

Simple Operation

The **XRP-3000** meter's microprocessor is the heart of its simplicity. Just four pressure-sensitive buttons on the readout unit's membrane keypad offer an extensive array of advanced functions. For example, to subtract ambient light, the user need only press the "ZERO" button. This activates autozeroing, sets the value to 0 and displays relative readings of subsequent measurements. "HOLD" freezes the display thus obtained, while "INTG" displays the average UV intensity after integrating the UV energy over time. These functions and other user-selectable parameters are easily accessible through the software's main and sub menus.

Multilingual Display Settings

The **XRP-3000** features user-selectable, multilingual display settings. Choose from four languages: English, French, German and Spanish.

Reliable

The **XRP-3000** radiometer is carefully quality-controlled to ensure that each unit has up-to-date calibration and meets stringent measurement requirements. Housed in a durable polycarbonate case, it features dependable solid-state electro-optical circuitry for long, trouble-free operation.

Portable

The **XRP-3000** is compact, lightweight and battery-operated for convenient use in the factory, field or any other location where measurements need to be taken. A slide-out panel allows for easy replacement of the unit's 9-volt batteries.

Versatile

The **XRP-3000** offers extreme flexibility in the workplace. For technicians performing radiographic examinations, the **XS-555/L luminance sensor detector** is available as an accessory to provide film viewer output measurements in cd/m^2 , cd/ft^2 or fL .

AccuMAX™ XRP-3000 Specifications

Readout Unit (XR-1000)

Resolution	4-digit autoranging display
Screen	128 x 64 dot pixel chip on glass transmissive monochrome LCD—2.8 in (7.1 cm) diagonal illuminated (backlit)
STN	
Sampling Rate	7.5 Hz (single sensor) 15 Hz (dual sensor)
Read Update	2 Hz
Overall Accuracy	Better than $\pm 5\%$ with reference to NIST standards
Temperature Coefficient	$\pm 0.025\%/^{\circ}\text{C}$ (0 to 50°C)

Dual UV-A/Visible Sensor Detector (XDS-1000)

Irradiance Range	
• UV-A Sensor	0–100 mW/cm^2
• Visible Sensor	0–5,300 lux (0–500 fc)
Power Requirements	
Battery Operation	Two non-rechargeable 9V alkaline battery cells are included as standard

Dimensions

Readout Unit	
• Length	7.75 in (19.7 cm)
• Width	4.25 in (10.8 cm)
• Thickness	1.25 in (3.2 cm)
• Weight	0.8 lb (360 g)

Sensor Detector

• Length	4.75 in (12.1 cm)
• Width	2.0 in (5.1 cm)
• Thickness	7/8 in (2.2 cm)
• Weight	0.22 lb (100 g)

USB Cable	5 ft (1.5 m)
------------------	--------------

Kit Includes:

• Water-resistant USB cable with adapter	XCB-100
• Rubber boot	XR-100
• Carrying case	XCC-100



SPECTRONICS CORPORATION

956 Brush Hollow Road, P.O. Box 483
Westbury, New York 11590
800-274-8888 • 516-333-4840
Fax: 800-491-6868 • 516-333-4859
www.spectroline.com

Distributed By: